



## Insulated Sectional Overhead Doors

### Applications


Suitable for cold climates, coolstores, industrial applications and acoustic insulation.

### Features

- Manufactured imported stipple foam filled panels with industrial grade hardware.
- Weathering provided by wedge action of tracks.
- Adjustable rollers provide rattle proof doors.
- Quick, easy opening provided by push-up or handchain override.
- Door balances in any position.
- Available in a limited range of RAL Colorsteel colours or wet sprayed to exterior surfaces. Internal faces are white.
- Operated manually, handchain or motorised.
- Doors are custom made to fit the size of opening.
- Branches in Auckland, Wellington and Christchurch

*Over 60 years of manufacturing experience and continuous refinement.  
Service and repairs, 24 hours a day, on all makes of commercial doors.*


# Insulated Sectional Overhead Doors - Specifications

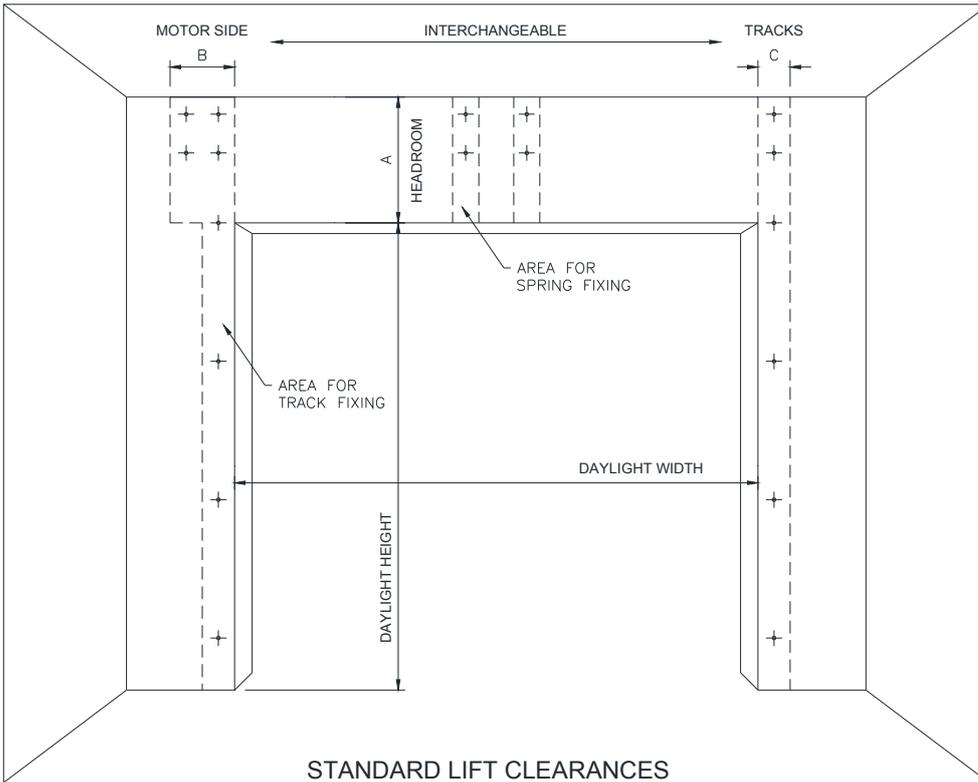

STANDARD LIFT CLEARANCES

DOOR CONSTRUCTION	MAX OPENING SIZE		HEADROOM A	SIDEROOM MOTOR B	SIDEROOM TRACKS C	PROJECTION D
	WIDTH	HEIGHT				
INSULATED PANEL	6.0m	8.0m	450mm	350mm	127mm	DLH + 500mm

Clearances and maximum sizes vary for other configuration options. Check with your nearest Metalbilt branch for confirmation of clearances required for specific door sizes as requirements may vary depending on door weight.

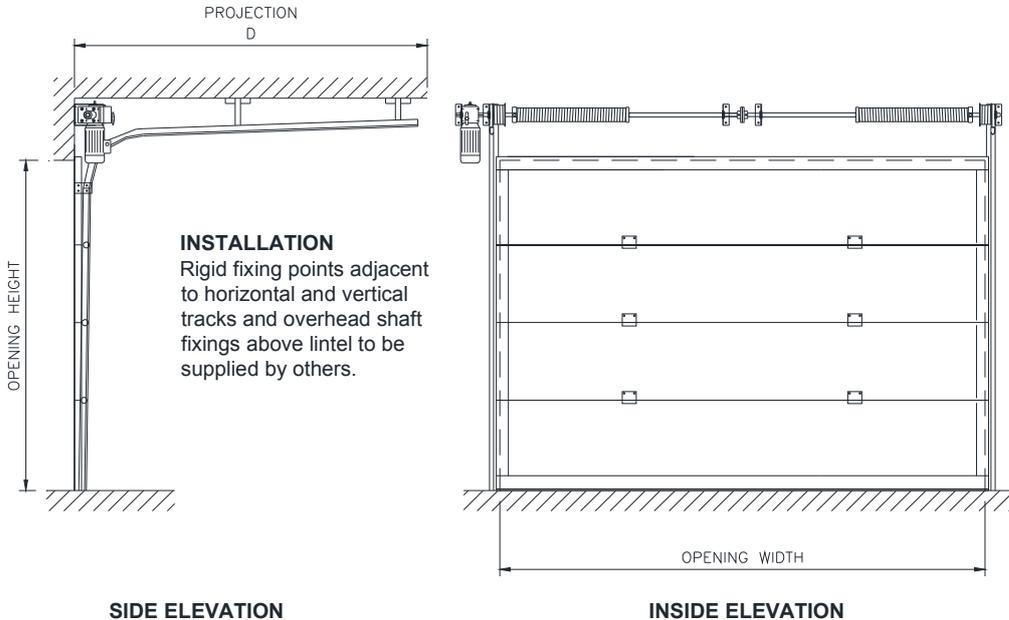

## DOOR PANELS

1. 40mm thick panels filled with foamed polyurethane, a moisture resistant insulant, sandwiched between two independent 0.45mm Colorsteel sheets.

2. Panels available in 7 RAL colours:

- White (standard)
- Blue
- Red
- Silver
- Grey
- Brown
- Ivory

Note: Colour only applied to exterior of panel. Internal face is white.

3. Panels fitted with steel reinforcement plates at the hinge fixing areas.

## OPERATION

Manual push-up up to 4m high.

Chain hoist recommended over 3m high up to maximum height.

Three phase or single phase Jackshaft motorising with push-up or handchain override in event of power failure. Assemblies are supplied complete with reversing starter and limit switches. Door controllers to accept signals from a range of activation features are also available.

## CONFIGURATION OPTIONS

- Standard Lift
- Low Headroom (200mm)\*
- Lift Clear\*
- Follow-the-roof\*
- Full Vertical Lift\*

\*Refer to Metalbilt® for clearances and size limitations applying to these configurations.

We reserve the right to alter specification without notice and without incurring obligation.

Contact us for details of your nearest Metalbilt® representative.

**Auckland**  
Postal Address  
PO Box 71169 Rosebank  
Auckland 1348 New Zealand

Street Address  
26 Timothy Place Avondale  
Auckland 1026 New Zealand

Phone 09 828 1167  
Fax 09 828 6358  
Email mbilt.auck@rcrtom.com.au

**Christchurch**  
Postal Address  
PO Box 6033 Upper Riccarton  
Christchurch 8442 New Zealand

Street Address  
92 Treffers Road, Wigram  
Christchurch 8024 New Zealand

Phone 03 338 2600  
Fax 03 338 4386  
Email mbilt.chch@rcrtom.com.au

**Wellington**  
Postal Address  
PO Box 38933 Wellington Mail Centre  
Lower Hutt 5045 New Zealand

Street Address  
33 Marsden Street Melling  
Lower Hutt 5010 New Zealand

Phone 04 568 2933  
Fax 04 568 7337  
Email mbilt.well@rcrtom.com.au



www.metalbilt.co.nz

An RCR Infrastructure Company