


| DOOR HEIGHT (m) | HEADROOM (DIM X) | INSIDE PROJECTION MOTOR (DIM Y) | INSIDE PROJECTION BARREL (DIM Z) |
|-----------------|------------------|---------------------------------|----------------------------------|
| 0 - 1.25        | 420mm            | 600mm                           | 360mm                            |
| 1.25 - 2.0      | 430mm            | 600mm                           | 370mm                            |
| 2.0 - 3.0       | 450mm            | 600mm                           | 385mm                            |
| 3.0 - 4.0       | 450mm            | 600mm                           | 400mm                            |
| 4.0 - 4.5       | 450mm            | 630mm                           | 430mm                            |

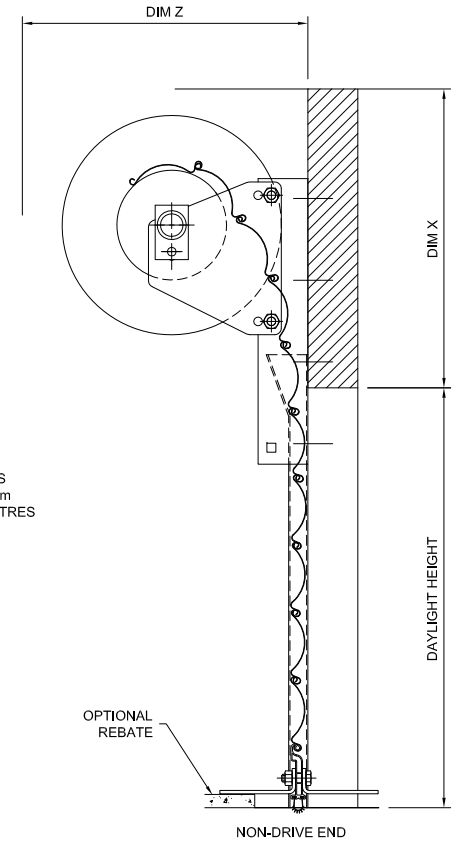

\* TO REDUCE GAP AT LINTEL RAISE DOOR 200mm

We reserve the right to alter specification without notice and without incurring obligation

STEEL ROLLER SHUTTER – STANDARD GUIDES  
LOW CYCLE MOTORISING – GENERAL ARRANGEMENT



|      |          |    |                   |          |        |    |             |      |
|------|----------|----|-------------------|----------|--------|----|-------------|------|
| C    | 13.12.13 | TS | MATERIAL – FINISH | CODE No. | SCALE  | :  | DRG No.     | ISS. |
| B    | 28.05.13 | TS |                   |          | DRAWN  | TS | 24.04.13    |      |
| ISS. | DATE     | BY |                   |          | APPVD. |    | SRS_STD_LCM | C    |